


CHART I

RECOMMENDED SPACING FOR SYNTHETIC BALES OR BALE TYPE BARRIERS AND TYPE III SILT FENCE




DITCH INSTALLATIONS AT DRAINAGE STRUCTURES




2010 FDOT Design Standards

TEMPORARY EROSION AND SEDIMENT CONTROL

Last Revision 07/01/07	Sheet No. 1 of 3
Index No. 102	




PROTECTION AROUND INLETS OR SIMILAR STRUCTURES

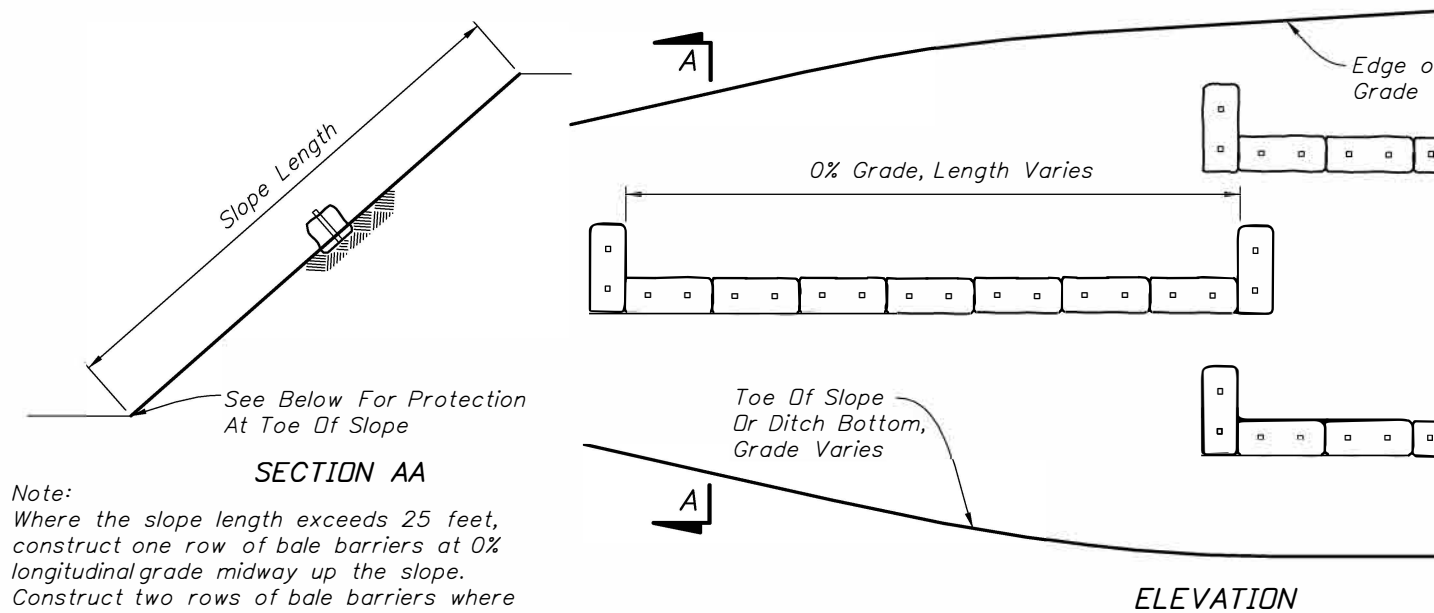


Note:
Where the slope length exceeds 25 feet,
construct one row of bale barriers at 0%
longitudinal grade midway up the slope.
Construct two rows of bale barriers where
the slope length exceeds 50 feet.


ALONG FILL SLOPE



AT TOE OF SLOPE BARRIERS FOR FILL SLOPES



SYNTHETIC BALES OR BALE TYPE BARRIERS FOR PAVED DITCHES



SYNTHETIC BALES OR BALE TYPE BARRIERS FOR UNPAVED DITCHES

NOTES FOR SYNTHETIC BALES OR BALE TYPE BARRIERS




1. Type I and II Synthetic Barrier should be spaced in accordance with Chart 1, Sheet 1.
2. Bales shall be anchored with 2-1" x 2" (or 1" dia.) x 4' wood stakes. Stakes of other material or shape providing equivalent strength may be used if approved by the Engineer. Stakes other than wood shall be removed upon completion of the project.
3. Rails and posts shall be 2" x 4" wood. Other materials providing equivalent strength may be used if approved by the Engineer.
4. Adjacent bales shall be butted firmly together.
5. Where used in conjunction with silt fence, bales shall be placed on the upstream side of the fence.
6. Bales to be paid for under the contract unit price for Synthetic Bales, LF. The unit price shall include the cost of filter fabric for Type I and II Barriers. Sandbags shall be paid for under the unit price for Sandbagging, CY. Rock bags to be paid for under the contract unit price for Rock Bags, EA.




2010 FDOT Design Standards

TEMPORARY EROSION AND SEDIMENT CONTROL

Last
Revision
07/01/09
Sheet No.
2 of 3
Index No.
102



SILT FENCE APPLICATIONS

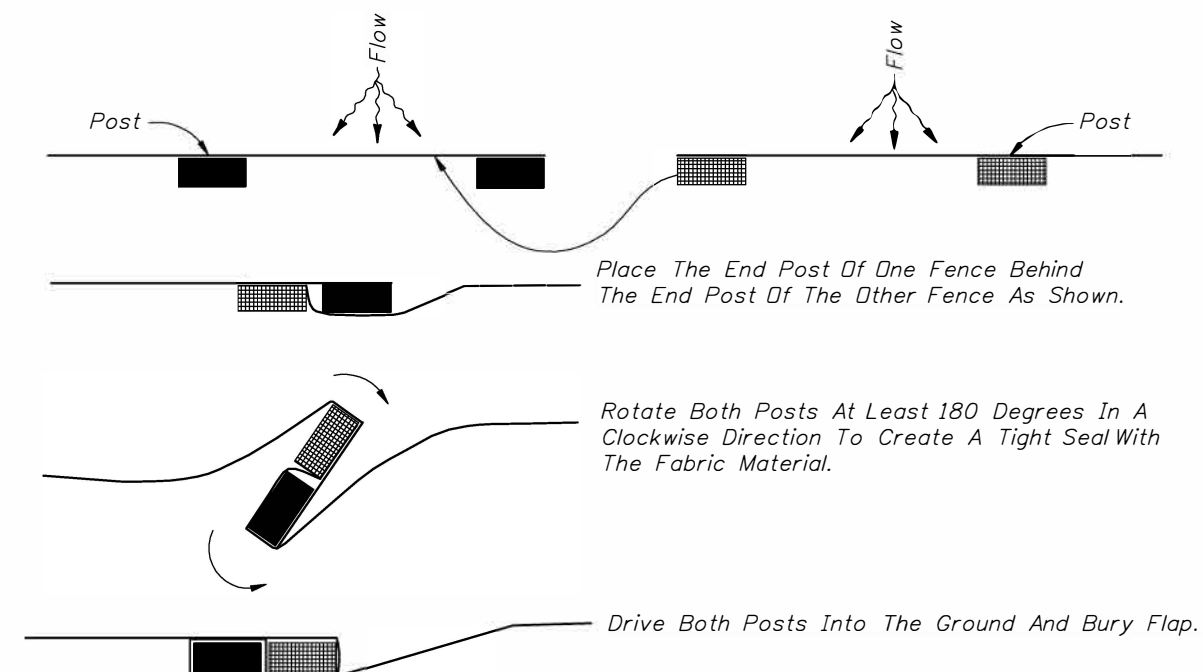

PLAN VIEW JOINING TWO SILT FENCES

NOTES FOR SILT FENCES

1. Type III Silt Fence to be used at most locations. Where used in ditches, the spacing for Type III Silt fence shall be in accordance with Chart 1, Sheet 1.
2. Type IV Silt Fence to be used where large sediment loads are anticipated. Suggested use is where fill slope is 1:2 or steeper and length of slope exceeds 25 feet. Avoid use where the detained water may back into travel lanes or off the right of way.
3. Do not construct silt fences across permanent flowing watercourses. Silt fences are to be at upland locations and turbidity barriers used at permanent bodies of water.
4. Where used as slope protection, Silt Fence is to be constructed on 0% longitudinal grade to avoid channelizing runoff along the length of the fence.
5. Silt Fence to be paid for under the contract unit price for Staked Silt Fence, (LF).



2010 FDOT Design Standards

TEMPORARY EROSION AND SEDIMENT CONTROL

Last
Revision
07/01/05

Sheet No.
3 of 3

Index No.
102